




ISO 9001:2015



GPL-SWIVEL EYELET

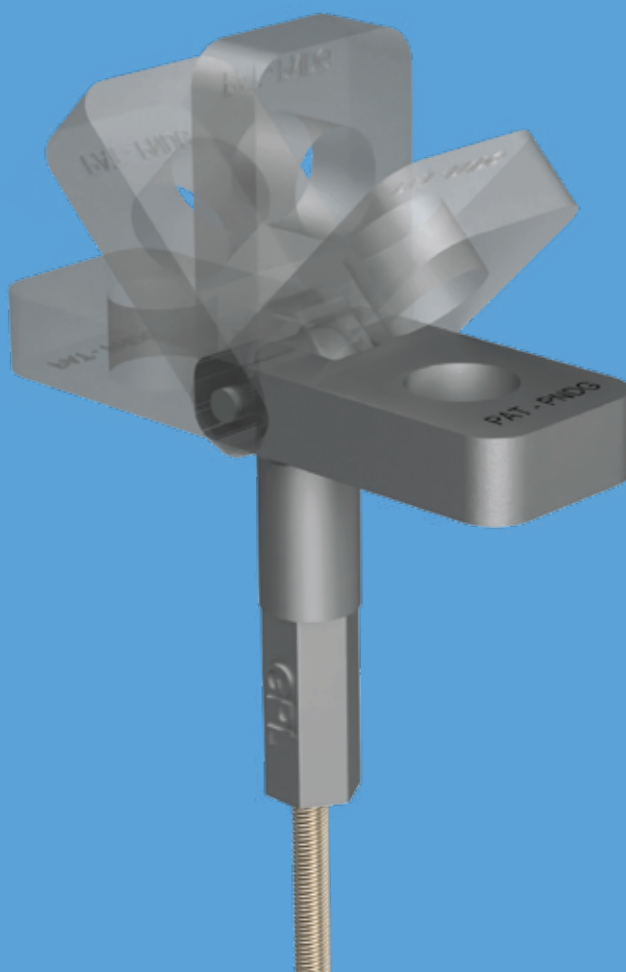

Swivel Eyelet straight



Swivel Eyelet 45°



Swivel Eyelet 90°

Swivel eyelets offer many advantages over a standard, fixed eyebolt

A swivel eyelet works in seismic bracing systems by providing a flexible and secure connection between the non-structural equipment and the structural equipment's.


A seismic bracing system consists of cables that are attached to the equipment and the beams, or girders using swivel eyelets fittings and brackets. It allows the cable to rotate and adjust to the angle and direction of the seismic force.

swivel eyelet is a versatile and reliable Hanging accessory that can be used in various applications such as construction, engineering, manufacturing, HVAC/ Lighting Suspension etc.

It also prevents twisting or bending of the cable or rod that could compromise its strength and integrity. It helps to minimize the damage and displacement of the equipment during an earthquake by transferring the seismic load to the structural members.

Some features of a swivel eyelet are:



- It has a high load capacity and can handle side loads up to 90 degrees.
- It is made of alloy steel or pre crimped wire and can be galvanized or plated to resist corrosion.
- It has a metric or UNC thread and can be easily installed or removed with the tool.
- It can be used with wire ropes, in different diameters/sizes.

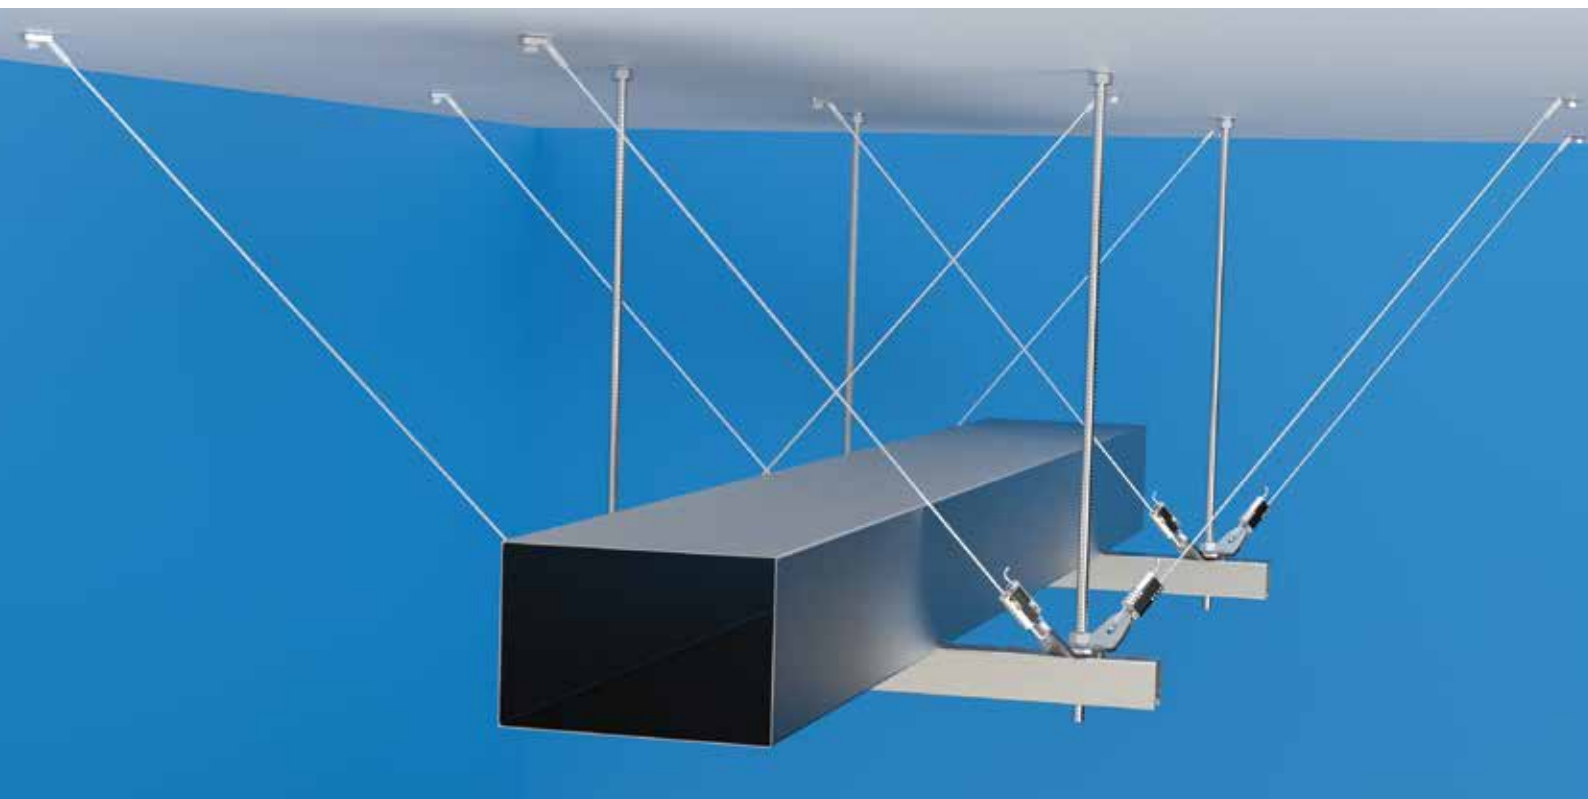


Advantage/Usage & Product Specifications of Swivel Eyelet.

ADVANTAGE


- 1) They are able to swivel and rotate, often through a complete 180 degrees.
- 2) The lifting eye is attached to the screw thread with bottom crimped flexible tail which allows them to swivel freely.
- 3) This makes them ideal for use in applications where the load may be subject to twisting or turning forces.
- 4) Swivel eye bolts are also more versatile than fixed eye bolts as they can be used at any angle and in any direction on the mentioned angle degrees.

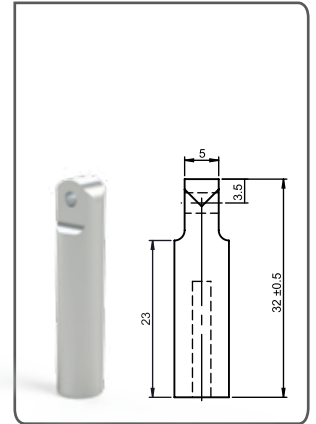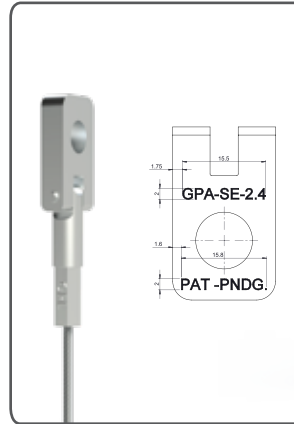


DIFFERENT ANGLES FOR USAGES






It can be use as straight



It can be use at 45°



It can be use at 90°



EYELET 45°, 90° & 180°

PRODUCT DETAILS

Description: - Swivel Eyelet

Model: - GPA-148/148A/149/149A

Material: - Steel

Coating: - Zinc

Recommended wire with safe working load:-

1.5mm – 30kg

2.0mm – 56kg

2.4mm – 70kg

3.2mm – 113kg

GPL GLOBAL PRESENCE



ISO 9001:2015



GOLDEN PEACOCK OVERSEAS LTD.

Corporate Office : 20A, NSEZ Noida-201305, UP, India Phone : 0120-4720201/04, mktg@goldenpeacock.com

www.goldenpeacock.com